




CONSOLE CONNECTOR KIT 1122 INSTALLATION INSTRUCTIONS

This kit is designed to convert a standard single-channel 122 or 122A Leslie Speaker to accept standard 11-pin Leslie input signals. Additional 122 cabinets can be added by installing 1122 kits and using standard 11-pin "Y" adapters.

KIT CONTENTS

1 pc. Installation Sheet	547-059338	4 pc. Nut 6-32 x $\frac{5}{8}$ "	999-001262
1 pc. Chassis	541-059333	4 pc. Screw #6 x $\frac{1}{2}$ "	885-050738
1 pc. Bottom Plate	541-059334	1 pc. PWB Assembly	124-001122
4 pc. Screw 6-32 x $\frac{5}{8}$ "	589-028001		

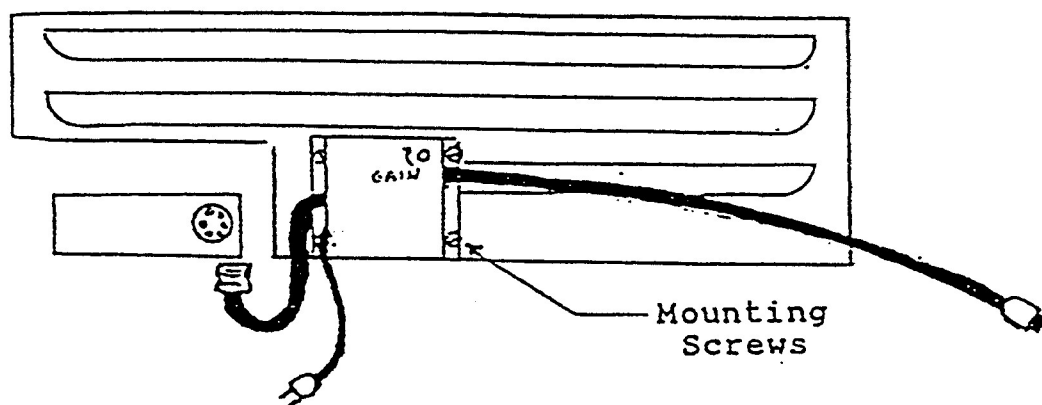

The easiest installation method is to plug in the 6-foot 11-conductor cable into the 11-pin socket on the rear of your organ or keyboard, then plug the short 6-conductor cable directly into the Leslie Speaker cabinet or into the 30' cable that was supplied with your cabinet. After this is done, connect the AC power cord from the 1122 Kit to one of the following power sources (see label):

117 volt 60Hz power
230 volt 50/60Hz power

An alternate installation method is to install the 1122 Kit on the lower panel of the Leslie Speaker cabinet. To do this, remove the 4 screws, nuts and rubber feet from the kit, then fasten the chassis and bottom plate to the rear panel, using the four #6 x $\frac{1}{2}$ " screws as shown in the above drawing. Connect the 6-pin cable connector to the 122 amplifier and connect the 11-conductor cable from the organ or keyboard to the 11-pin plug at the end of the 6 foot, 11-conductor cable. After this is done, connect the AC power cord from the 1122 Kit to one of the following power sources (see label):

117 volt 60Hz power
230 volt 50/60Hz power

To adjust the gain of the 1122 Kit preamp, set the 122 level control to "2". Turn on the organ or keyboard, set all level controls to maximum and play multiple notes (4- or 5-note chords) with both hands to obtain maximum output. If the output is not distorted, increase the gain of the 1122 Kit preamp by using a small screwdriver and rotating the control clockwise a small amount. Then re-test by playing several chords again, listening for distortion. Repeat this procedure until the output becomes distorted, then reduce the gain control until the distortion has disappeared. Now reset the 122 level control to "7". The 1122 Kit installation is now complete.